

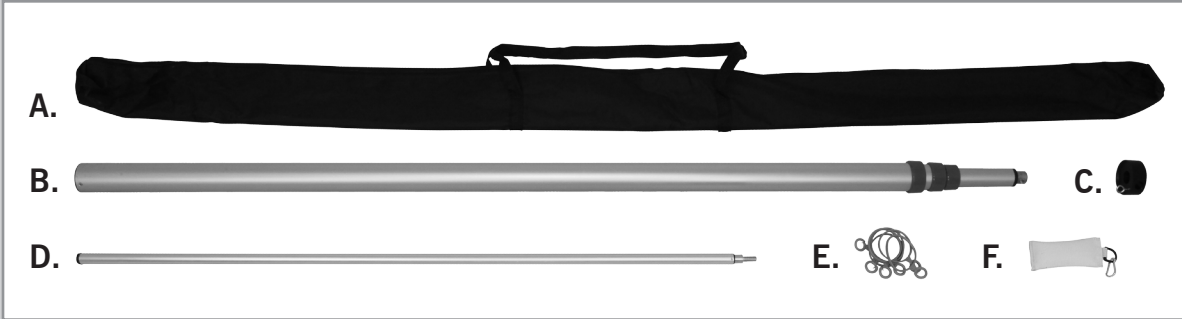


## ASSEMBLY HARDWARE

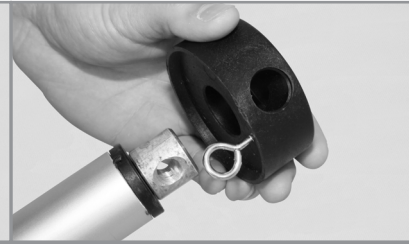

- A. Carrying Case
- B. Aluminum Pole
- C. Pole Cap
- D. Banner Arm
- E. Pole Clips
- F. Flag Weight



## ASSEMBLY

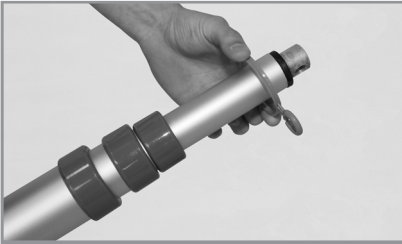

1. Locate the 6 Pole Clips (E) and slide all of them onto the Aluminum Pole (B).
2. Place the Pole Cap (C) on the top of the Aluminum Pole (B).




3. Make sure both openings, on the side of the Aluminum Pole (B) and Pole Cap (C), are lined up.
4. Screw Banner Arm (D) into opening on the Pole Cap (C).

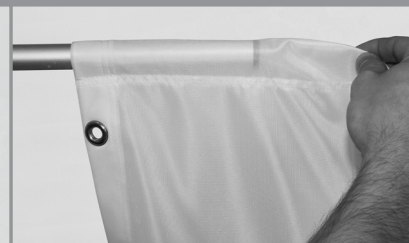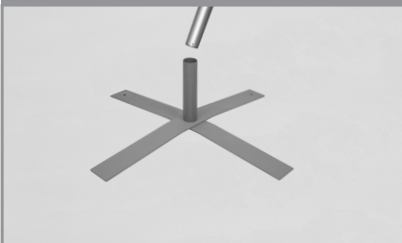


5. On a clean, flat surface, place desired base and insert bottom of Aluminum Pole (B).
6. Slide the print's pole sleeve onto Banner Arm (D).



7. Attach flag to the Aluminum Pole (B) by taking the upper most Pole Clip (E) and attach it to the upper most grommet on the flag. Continue in order downward until all Pole Clips (E) are secure except for the bottom Pole Clip

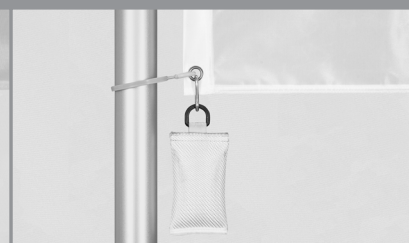


8. Raise top pole upward until fully extended.\* Firmly secure it by turning the top pole clockwise while keeping the pole below still. Repeat with next 2 poles. Attach Flag Weight to bottom grommet.



9. Attach bottom Pole Ring to bottom grommet with Weight Bag.

\*Note - DO NOT overextend sections of Aluminum Pole. This can result in pole separation, which may cause damage to product or injury to assembler.

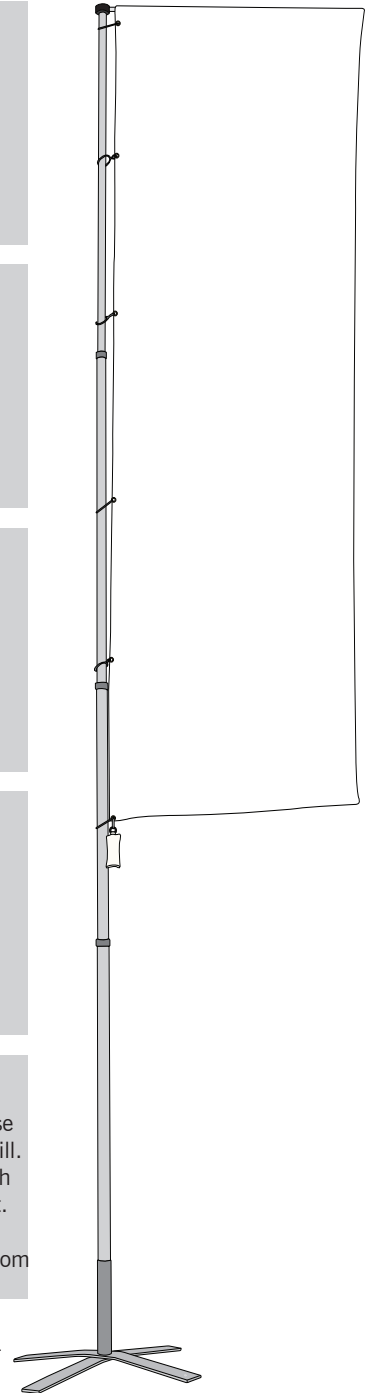

Do not fly your Empire Pole Plus in extreme winds (24-31mph or 6bft and higher) and/or thunderstorms. Do not use near overhead wires. User must read and observe construction sheet. If this is not done correctly it may result in injury or death and all warranties will be void. All warranties will be void if the Empire Pole Plus hardware is used with any flag not produced by us.

